


EDA系列 EDA Series

- 
 PFC功能
- 
 高效率
- 
 小体积
- 
 过温保护
- 
 过压保护
- 
 过载保护
- 
 短路保护

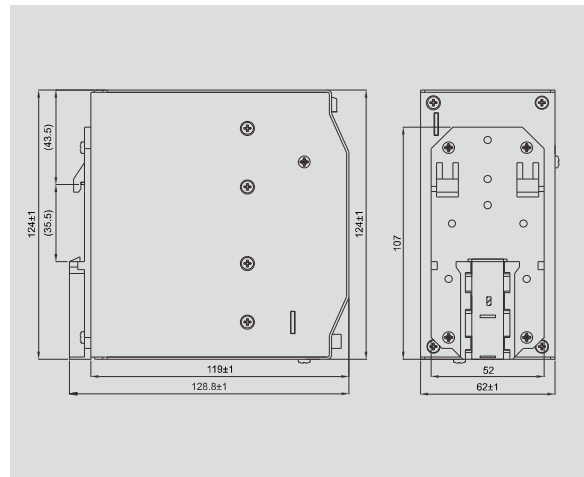


产品特性

- 全范围AC输入
- PF ≥ 0.99 @ 115Vac, ≥ 0.92 @ 230Vac
- 效率可达93%
- 通电指示灯
- 自然风冷
- 内置DC OK继电器连接
- 150%峰值功率能力
- 抑制冲击电流可选, 低于18A
- 负载均流可选
- 过载 / 过压 / 过温 / 短路保护
- 3年质保

Product features

- Universal AC input / full range
- PF ≥ 0.99 @ 115Vac, ≥ 0.92 @ 230Vac
- High efficiency up to 93%
- Power on indication
- Air cooling
- Built-in DC OK relay contact
- 150% peak load capability
- Optional inrush current immunity, less than 18A
- Optional current sharing
- Protections: Overload / Over voltage / Over temperature / Short circuit
- 3 years warranty

导轨附件 (金属)
Din-rail accessories (metal)



技术特性

- 输入电压 90~264Vac, 127~370Vdc
- 输入频率 47~63Hz
- 冲击电流 18A@90~264Vac (可选)
70A@230Vac
35A@115Vac 满载冷态
- 保持时间 ≥ 20ms@230Vac 满载
- 过载保护 110%~150% 额定负载, 延迟3s后, 关闭输出, 自动恢复
- 过压保护 120%~150% Vo
- 运行温度 -25℃~70℃
- 安全标准 EN60950-1, UL508
- EMC标准 EN55032 Class B
EN55024
EN61000-3-2,3
- 绝缘标准 I/P-O/P: 3kVac, 1min
I/P-FG: 1.5kVac, 1min
O/P-FG: 0.5kVac, 1min
- 重量 0.81kg/pcs

Specifications

- Input voltage 90~264Vac, 127~370Vdc
- Input frequency 47~63Hz
- Inrush current 18A@90~264Vac (Optional)
70A@230Vac
35A@115Vac full load cold start
- Hold up time ≥ 20ms@230Vac full load
- Overload protection 110%~150% of full load for 3s and shut down output voltage with auto-recovery
- Over voltage protection 120%~150% Vo
- Operating temperature -25℃~70℃
- Safety standard EN60950-1, UL508
- EMC standard EN55032 Class B
EN55024
EN61000-3-2,3
- Withstand voltage I/P-O/P: 3kVac, 1min
I/P-FG: 1.5kVac, 1min
O/P-FG: 0.5kVac, 1min
- Weight 0.81kg/pcs

P/N 产品型号	Output 输出	R & N 纹波 & 噪声	Effi. 效率	Load Regulation 负载调整率	DC Adjustment Range DC可调范围
EDA-240-12	12V, 16A	100mV	91%	± 1%	12V~14V
EDA-240-24	24V, 10A	100mV	93%	± 1%	24V~28V
EDA-240-48	48V, 5A	150mV	93%	± 1%	48V~53V