


EDP系列 EDP Series

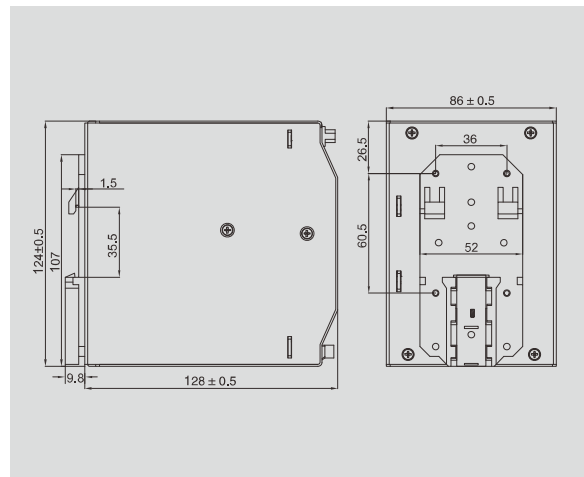


产品特性

- 全范围AC输入
- PF ≥ 0.99 @ 115Vac, ≥ 0.96 @ 230Vac
- 经济型设计
- 效率可达94.5%
- 短路 / 过载 / 过压 / 过温保护
- 内置DC OK继电器连接
- 并联冗余功能 (9+1)
- 150%峰值功率能力
- 自然风冷
- 通过CE、CB、TUV认证
- 3年质保

Product features

- Universal AC input / full range
- PF ≥ 0.99 @ 115Vac, ≥ 0.96 @ 230Vac
- Economical design
- High efficiency up to 94.5%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in DC OK relay contact
- Parallel redundant function (9+1)
- 150% peak load capability
- Air cooling
- CE, CB, TUV approved
- 3 years warranty

导轨附件 (金属) Din-rail accessories (metal)



技术特性

- 输入电压: 90~264Vac, 127~370Vdc
- 输入频率: 47~63Hz
- 冲击电流: 50A@230Vac 满载冷态
- 保持时间: ≥20ms@230Vac 满载
- 运行温度: -25℃~70℃
- 防护等级: IP20
- 过压保护: 120%~150% Vo
- 过流保护: 110%~150% Io
- 安全标准: EN60950-1
- EMC标准: EN55032 Class B, EN55024, EN61000-3-2,3
- 绝缘标准: I/P-O/P: 3kVac 1min, I/P-FG: 1.5kVac 1min, O/P-FG: 0.5kVac 1min
- 重量: 1.32kg/pcs

Specifications

- Input voltage: 90~264Vac, 127~370Vdc
- Input frequency: 47~63Hz
- Inrush current: 50A@230Vac, full load cold start
- Hold-up time: ≥20ms@230Vac full load
- Operating temperature: -25℃~70℃
- Ingress protection: IP20
- Over-voltage protection: 120%~150% Vo
- Over-current protection: 110%~150% Io
- Safety standard: EN60950-1
- EMC standard: EN55032 Class B, EN55024, EN61000-3-2,3
- Withstand voltage: I/P-O/P: 3kVac 1min, I/P-FG: 1.5kVac 1min, O/P-FG: 0.5kVac 1min
- Weight: 1.32kg/pcs

P/N 产品型号	Output 输出	R & N 纹波 & 噪声	Effi. 效率	Load Regulation 负载调整率	DC Adjustment Range DC可调范围
EDP-480-24	24V, 20A	100mV	94%	± 1%	24V~28V
EDP-480-36	36V, 13.4A	120mV	94.5%	± 1%	36V~40V
EDP-480-48	48V, 10A	150mV	94.5%	± 1%	48V~52V