


ESA系列 ESA Series

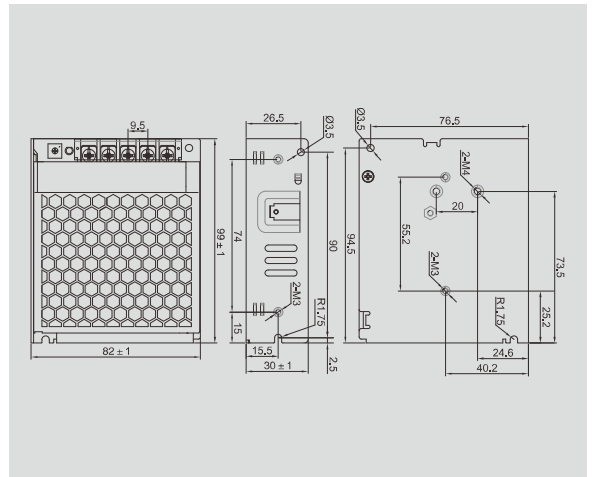

产品特性

- 全范围AC输入
- 超薄型, 30mm高度
- 待机功耗 ≤ 0.3W, 符合能源之星V级标准
- 耐受5G振动
- 过载 / 过压 / 短路保护
- 自然风冷
- 2年质保

Product features

- Universal AC input / full range
- Ultra-thin, 30mm height
- No load power consumption ≤ 0.3W, meet V class of Energy Star
- 5G vibration
- Protections: Overload / Over voltage / Short circuit
- Air cooling
- 2 years warranty

技术特性

输入电压	90~264Vac, 127~370Vdc
输入频率	47~63Hz
冲击电流	35A @ 230Vac 20A @ 110Vac, 满载冷态
保持时间	>30ms @ 230Vac 满载
过载保护	110%~180% 自动恢复
过压保护	120%~145% Vo
运行温度	-20°C~70°C
安全标准	EN60950-1, CCC GB4943.1:2011
EMC标准	EN55032 Class B EN61000-3-2,-3 EN55024 (IEC61000-4-2,3,4,5,6,8,11)
绝缘标准	I/P-O/P: 1.5kVac, 1min I/P-FG: 1.5kVac, 1min O/P-FG: 0.5kVac, 1min
MTBF	300,000 hours at 25°C
重量	0.2kg/pcs

Specifications

Input voltage	90~264Vac, 127~370Vdc
Input frequency	47~63Hz
Inrush current	35A @ 230Vac 20A @ 110Vac, full load cold start
Hold-up time	>30ms @ 230Vac full load
Overload protection	110%~180% auto-recovery
Over voltage protection	120%~145% Vo
Operating temperature	-20°C~70°C
Safety standard	EN60950-1, CCC GB4943.1:2011
EMC standard	EN55032 Class B EN61000-3-2,-3 EN55024 (IEC61000-4-2,3,4,5,6,8,11)
Withstand voltage	I/P-O/P: 1.5kVac, 1min I/P-FG: 1.5kVac, 1min O/P-FG: 0.5kVac, 1min
MTBF	300,000 hours at 25°C
Weight	0.2kg/pcs

P/N 产品型号	DC Output 输出	R & N 纹波 & 噪声	Effi. 效率	Load Regulation 负载调整率	DC Adjustment Range DC可调范围
ESA-50-12	12V, 4.2A	100mV	85%	± 1%	10.8V~13.2V
ESA-50-24	24V, 2.2A	150mV	88%	± 0.5%	21.6V~26.4V
ESA-50-48	48V, 1.1A	200mV	88%	± 0.5%	43.2V~52.8V

平板开关电源 MOUNTED POWER SUPPLY